


JET



WALL AXIAL FANS FOR DIRECT EXHAUST

DYNAIR®

DESCRIPTION


JET is an axial fan suitable for exhausting air directly to the outside or through short length ducting and adapted for wall, panel and ceiling installation in bathrooms, toilets, utility rooms, kitchens and so on.

CONSTRUCTION

- Manufactured in shock-proof high quality technopolymer
- Maintenance-free, self lubricating sleeve bearing motor for **long life and noiseless running**
- Induction motor with overheating protection 230V-50Hz
- Available sizes: ø100, 120, 150
- Easy installation, maintenance and cleaning
- IPX2 protected
- Suitable for operation in max. ambient temperature of +40°C
- Double insulation: no earth connection is needed
- Speed controllable
- **CE** marked and IMQ approved
- Complies with IEC 60335-2-80, LVD 2006/95/CE and EMC 2004/108/CE



CURVES

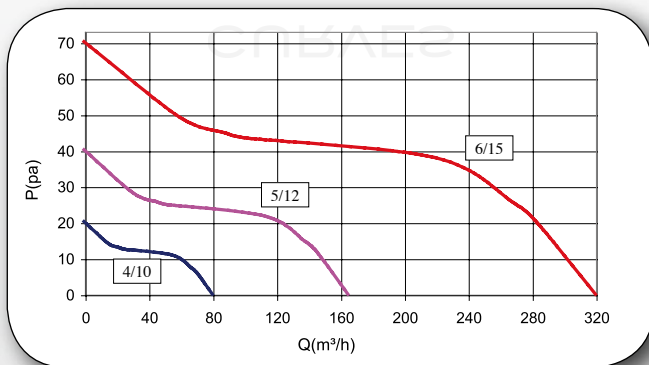

VERSIONS

Jet

Basic model

Jet/TIMER

Integral timer adjustable from 3 to 25 minutes

SPECIFICATION

Model	Item code	m3/h	Pa	W	dB(A)	Protection	Marked
JET 4/10	2JO1054	80	20	14	39	IPX2	Ⓜ CE
JET 4/10 TIMER	2JO1056	80	20	14	39	IPX2	Ⓜ CE
JET 5/12	2JO1254	165	40	18	43	IPX2	Ⓜ CE
JET 5/12 TIMER	2JO1256	165	40	18	43	IPX2	Ⓜ CE
JET 6/15	2JO1554	320	70	40	50	IPX2	Ⓜ CE
JET 6/15 TIMER	2JO1556	320	70	40	50	IPX2	Ⓜ CE

ACCESSORIES

Model	R15	RVS	IGR	BC	BCR	MGE	MFE
JET 4/10	2RV4125	2RV4056	2UM1012	2BC0000	2BC0001	2GE2000	2GE2002
JET 5/12	2RV4125	2RV4056	2UM1012	2BC0025	2BC0028	2GE2000	2GE2002
JET 6/15	2RV4125	2RV4056	2UM1012	2BC0026	2BC0029	2GE2004	2GE2005
JET 4/10 TIMER				2BC0000	2BC0001	2GE2000	2GE2002
JET 5/12 TIMER				2BC0025	2BC0028	2GE2000	2GE2002
JET 6/15 TIMER				2BC0026	2BC0029	2GE2004	2GE2005

No sensors or controllers can be connected to timer models

ACCESSORIES



R15 - Built-in electronic speed controller
 Infinitely variable speed controller by potentiometer
 Suitable for surface and built-in application
 ON/OFF light switch
 IP42 protection
 Provided with protection fuse
 Max load: 1,5 A
 Weight: 0,5 Kg
 Dimensions: 138x80x42
 CE marked



RVS - Speed controller with transformer
 5 steps speed controller
 ON/OFF switch
 IP42 protection
 Max load: 100 W (0,5 A)
 Supply voltage: 230V - 50Hz/60Hz
 Sizes: 118x118x58 mm
 Weight: 0,7 Kg
 CE marked



IGR - Humidity sensor
 Automatic ON/OFF switching according to the Relative Humidity level (adjustable from 40 to 80%).
 Max load: 150 W
 Supply voltage: 230V - 50Hz
 Sizes: 114x76x38 mm
 Weight: 0,1 Kg
 CE marked



BC - Ventilation white round grille
 For indoor and outdoor use



BCR - Ventilation white round grille with net
 For indoor and outdoor use




MGE
 External gravity shutter



MFE
 External fixed grille


DIMENSIONS

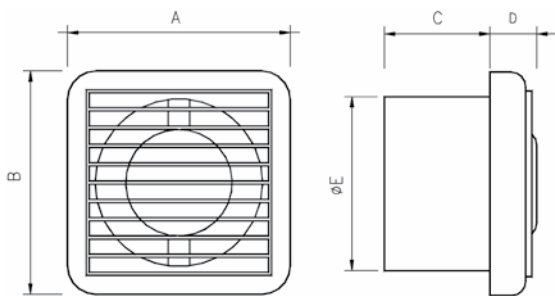

Model	A	B	C	D	E	Kg.*
JET 4/10	125	125	92	29	97	0,5
JET 5/12	150	150	102	29	118	0,8
JET 6/15	185	185	122	29	151	1,2

*net weight

APPLICATIONS

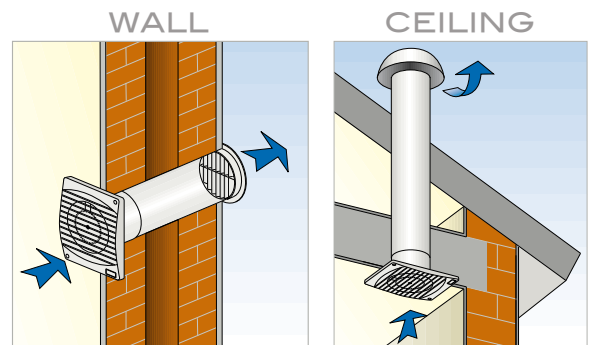

Maico Italia S.p.A.

Via L. da Vinci n° 4 - 25017 - Lonato (BS) Italy

⚡ **DYNAIR®** is a trademark of Maico Italia S.p.A.

WWW.DYNAIR.IT